

VLT-ST Vacuum Leak Tester (Standard Model) (Air and water tight test box: vacuum test)



Tests on:


Bottles: Glass or PET and Preforms

Caps: Aluminium, other metal, plastic

Cans: Aluminium, others


Pots: caps, film, blisters etc.

LEAK DETECTION BY SETTING VACUUM WITH OR WITHOUT STEP

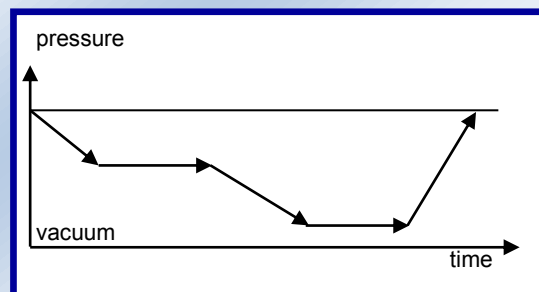


Test curve

VLT-ST is equipped with a touching screen. It's visual and easy to operate. Adjustable vacuum and holding time stage setting, meets different test requests of various products.

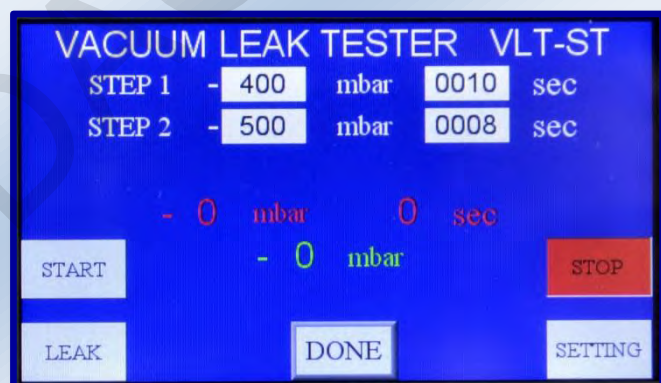

Test interface

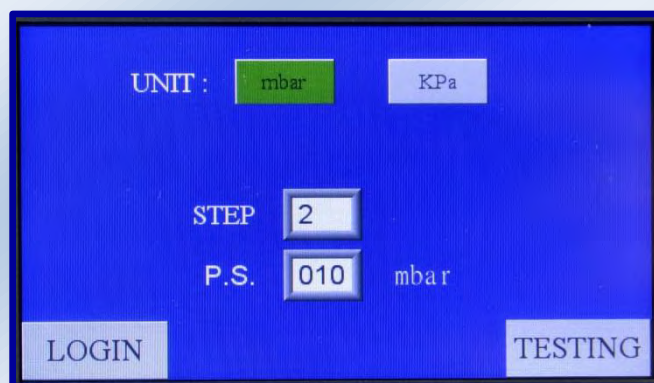



Setting screen

Specifications:

- Vacuum adjustable up to - 999 mb
- Box with dimensions upon request
- Box made of polished transparent PMMA (very rugged)
- Easy to use and safe
- Touching screen display
- 2 stages of vacuum and holding time setting
(Optional for 3 stages by order)
- Accuracy: 0.5% of the measure
- Delivered with vacuum generator
- Runs with 6 bar network
- Verification and calibration quick and easy

Optional parts:

- Immersion system
- High performance pump (vacuum -999 mb)

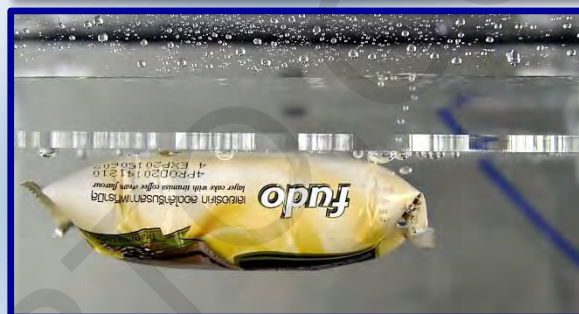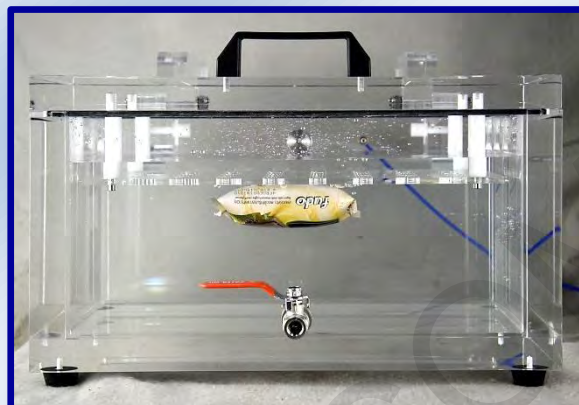

Equipped with immersion system



Various size of box upon request